



PCI / IB 03 / 05705  
28.11.03



INVESTOR IN PEOPLE

REC'D 16 DEC 2003

WIPO

PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Best Available Copy

Signed

Dated 19 September 2003

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)



The  
**Patent  
Office**  
□□□□□

1/77

**Request for grant of a patent**  
*See notes on the back of this form. You can  
also get an explanatory leaflet from the Patent  
Office to help you fill in this form)*

**The Patent Office**  
Cardiff Road  
Newport  
Gwent NP10 8QQ

Your reference

PHGB030004

Patent application number  
(The Patent Office will fill in this part)

07 JAN 2003

0300360.5

08JAN03 E775437-2 D02879  
P01/7700 0.00-0300360.5

Full name, address and postcode of the or of  
each applicant (*underline all surnames*)

KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1,  
6521 BA EINDHOVEN  
THE NETHERLANDS  
07419294001 ✓

LG PHILIPS LCD CO., LTD.  
20 YOIDO-DONG,  
YOUNGDUNGPO-KU  
SEOUL

07881774001

Patents ADP Number (*if you know it*)

If the applicant is a corporate body, give the  
country/state of its incorporation

THE NETHERLANDS

REPUBLIC OF KOREA

Title of the invention

MANUFACTURE OF SHAPED STRUCTURES  
IN LCD CELLS, AND MASKS THEREFOR

Name of your agent (*if you have one*)  
"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(*including the postcode*)

Philips Intellectual Property and Standards  
Cross Oak Lane  
Redhill  
Surrey RH1 5HA  
08359655001 ✓

Patents ADP number (*if you know it*)

If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these earlier applications  
and (*if you know it*) the or each application number

Country

Priority Application number  
(*if you know it*)

Date of filing  
(*day/month/year*)

GB

0229228.2

14.12.2002

If this application is divided or otherwise  
derived from an earlier UK application, give  
the number and the filing date of the earlier  
application

Number of earlier application

Date of filing  
(*day/month/year*)

Is a statement of inventorship and of right to  
grant of a patent required in support of this  
request? (*Answer "Yes" if:*

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an  
applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

1. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description  
Claims(s)  
Abstract  
Drawings

9  
2  
1  
6  
82

2. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and  
search (*Patents Form 9/77*)

Request for substantive examination  
(*Patents Form 10/77*)

Any other documents  
(*Please specify*)

I/We request the grant of a patent on the basis of this application.

Signature *BTS*

Date *6th January 2003*

Name and daytime telephone number of  
person to contact in the United Kingdom

01293 815294

(Brian T Stevens)

**Warning**

For an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" *Patents Form 7/77* will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

### MANUFACTURE OF SHAPED STRUCTURES IN LCD CELLS, AND MASKS THEREFOR

5

The invention relates to the manufacture of liquid crystal displays, and features thereof. In particular, the invention relates to a method for forming shaped structures in liquid crystal display (LCD) cells using semi-transparent masks.

10

One such example of a shaped structure in a LCD is the diffusely reflective pixel electrode as used in a thin film transistor (TFT) reflective active matrix liquid crystal display (reflective AMLCD). This is generally formed with an irregular upper surface topography, so that when coated with a reflective metal layer, usually aluminium or silver, incident light is dispersed over the viewing area of the LCD. It is important that the dispersion is controlled to achieve a compromise between having a suitably large viewing area and having an adequate brightness of reflected light in the viewing area. One known method for forming this irregular surface is to firstly apply a photosensitive layer to the TFT plate of the AMLCD. This layer is then patterned by conventional photolithography and etching, to create many micro-bumps on the surface of each pixel electrode of the TFT plate. This results in a surface topography with steeply sided islands, which is then heated so that reflow occurs, providing a more curved surface topography which can then be covered with the reflective metal coating.

25

In a more complex method of forming the diffusely reflective pixel electrode, such as that disclosed in US6163405, at least one slant is introduced to the surface of the pixel electrodes on the TFT plate before the forming of the micro bumps. In this manner, the light can be reflected into a preferred viewing area, which may not be perpendicular to the TFT plate. This type of slanted diffusive reflector is referred to as a diffusive micro slant reflector (DMSR).

30

US6163405 discloses several methods involving photolithography for forming such a slanted surface on a pixel electrode, and forming irregular micro bumps on this. The main method disclosed involves producing irregular ridges of different heights by using a single photo mask a number of times as part of a multi-exposure shift method of photolithography. The photo mask is arranged with small UV-transparent slots on an otherwise UV-opaque mask. UV-light is then directed through the mask and onto a layer of photosensitive material that has been coated onto the pixel electrodes. In positive photolithography, the UV light is used to expose the photosensitive material, and the exposed areas are removed during a developing stage. Conversely, negative photolithography involves removing, during a developing stage, areas of a photosensitive material that were not exposed to UV-light.

After UV exposure at a certain UV intensity, the mask with transparent slots is shifted a small amount and a further exposure step is performed, with a different UV intensity or exposure time. This can be carried out a number of times so that once developed, the pixel electrode surface is left with an irregularly stepped line of ridges on its surface topography. A further mask is then used to create the micro-bumps on the surface of the ridges, which are then heated to propagate reflow. This produces a DMSR pixel electrode with an optimised viewing area. However, in the production of LCD displays, the multiple UV exposures are very time consuming and costly. Furthermore, the standard photolithographic aligners used in AMLCD factories do not usually have the facility for multi-exposure shift. Accordingly, this particular multi-exposure method disclosed in US6163405 is impractical for use in large-scale production of LCD displays.

A further method disclosed in US6163405 uses a grey-tone mask, also known as a half-tone mask. This is a photo mask that has areas that exhibit at least one degree of semi-transparency to light. The result is that a certain intensity of UV-light for a set exposure time can be applied through this mask to produce multiple levels of exposure of a photosensitive material. For instance, a substrate for a LCD, coated with photosensitive material and exposed in a single UV exposure through a grey-tone mask, once developed,

could have the same multi-level surface topography as that created using the multi-exposure shift method of photolithography.

One method for the production of grey-tone photo masks involves creating a fine pattern of transparent apertures on an otherwise opaque mask, which partially reduces the amount of UV-light penetration. Furthermore, the light that penetrates the mask is diffracted and hence dispersed, so that, when used to expose a photosensitive material, relatively uniform exposure is achieved. By altering the size of the apertures, different percentages of UV-light can be allowed to penetrate the mask. These types of grey-tone mask can be produced with almost any arbitrary feature shape. However, their major shortfall is that, where a very small feature size is required, less than  $2\mu\text{m}$  for instance such as in the production of diffusely reflective pixel electrodes for LCD's, they are very expensive to produce. Furthermore, diffraction at the edges of features on the mask causes the features to lack definition, and so the accuracy of the mask is limited. These shortfalls render the use of the diffraction mask impractical for certain applications in industry.

The invention proposes a method that decreases the cost associated with the production of shaped structures in AMLCD cells by using a grey-tone photo mask with a material such as hydrogenated silicon-rich silicon nitride in the photolithographic production process. Silicon-rich silicon nitride ( $\text{SiNx}$ ) masks are relatively cheap to produce, even when small feature size is required.

According to one aspect of the invention there is provided a method of forming shaped structures on a device plate (e.g. a transistor plate), comprising applying a photosensitive layer to said plate, and forming the shaped structures on the photosensitive layer in a photolithographic process using a grey-tone photo mask, wherein the mask comprises at least one region of semi-transparent material, and said material has a degree of transparency which is dependent on the optical band gap of the material.

The invention further provides a method using such a photo mask in said photolithographic process so as to produce an irregular surface

topography for a diffusely reflective pixel electrode of said liquid crystal display. Said surface topography for said diffusely reflective pixel electrode of the liquid crystal display may have multiple levels of thickness.

The material regions used in the grey-tone photo mask may be  
5 hydrogenated silicon-rich silicon nitride  $\text{SiNx:H}$  with  $x$  less than 1.

Advantageous features in accordance with the present invention are set out in the appended claims. These and others will be illustrated in specific embodiments of the invention now to be described, by way of example, with reference to the accompanying drawings, in which:

10 Figures 1a to 1e are cross-sectional views of a TFT plate for a reflective LCD display during various stages in the process used to define its diffusely reflective surface topography;

Figure 2 is a graph on which is plotted the optical band gap of  $\text{SiNx}$  layers according to different  $\text{NH}_3 / \text{SiH}_4$  gas ratios as used in their production;

15 Figure 3 is a graph plotting the transmission characteristics, according to the wavelength of light used, of three different formations of  $\text{SiNx}$ , A, B and C, each with a different optical band gap, as used in a photomask;

Figure 4 is a graph on which is plotted the transmission percentage according to wavelength of light used, for three thicknesses of  $\text{SiNx}$ , D, E and  
20 F, each having an optical band gap of 2.3 eV;

Figures 5a to 5d are cross-sectional views of a  $\text{SiNx}$  photo mask during various stages of its fabrication;

Figure 6 depicts a method using a  $\text{SiNx}$  photo mask, for forming micro bumps on a TFT AMLCD pixel electrode, including a slanting feature; and

25 Figures 7a and 7b are a cross-sectional view and plan view respectively, of a TFT plate following the forming of the micro bumps having a slanting feature on its surface.

Figures 1a to 1e illustrate one embodiment of the method of production  
30 of diffusely reflective pixel electrodes for use in an AMLCD, using  $\text{SiNx}$  grey-tone masks. In this example, the AMLCD incorporates micro-bumps without the diffusive micro slant reflection (DMSR) feature.

---

Figure 1a illustrates an active matrix liquid crystal display (AMLCD) device incorporating the diffusely reflective TFT electrode whose fabrication is shown in Figures 1b to 1e. A liquid crystal 1 is interposed between a TFT plate 2 and a glass substrate 3. Also shown is a colour filter layer 4 which may be arranged in a pattern of red, green and blue regions to provide an array of red, green and blue pixels. The TFT 5 is switched by row and column electrodes (not shown).

Figure 1b is a cross sectional view of a TFT pixel electrode plate 2 as used in the AMLCD, after a layer of photo-definable polymer 6 has been applied. The polymer may consist of a material such as polyimide, acrylic, or photoresist. In one example, the material used was positive-tone aqueous developing photodefinable HD-8001 polyimide as produced by HD Microsystems. This may be applied using a known method, such as that of spinning or screen-printing. Also illustrated in Figure 1b is the SiNx grey-tone mask 7 which is employed for the photolithographic stage in the production process. This mask is formed by the deposition of layers of semi-transparent SiNx 8 and opaque chrome 9 onto a UV-transparent mask substrate 10. A region 10A of the mask is not coated with the layers 8 or 9 and is thus transparent to UV light.

The mask 7 is placed in registration with the TFT plate, and UV light is directed through it in order to expose the photo-definable polyimide coating 6 on the TFT plate 2. Figure 1c depicts this stage in process, illustrating the TFT plate 2 following the UV-exposure, which results in exposed regions 11 of polysilicon. Areas of the polysilicon directly beneath chrome regions 9 of the mask will not be exposed, due to the opaque characteristics of chrome. These are marked 0% Tr on the figure, representing 0% transmission of UV. Areas of the photo-definable polyimide that are directly beneath UV-transparent regions of the mask such as region 10A, will be fully exposed and those areas beneath SiNx regions 8 will be partly exposed, for example as that marked 35% Tr, the exposure being dependant on the optical properties of the SiNx used. This photolithographic process is used to define the micro-bumps 12 and the via 13 for a connection to the TFT electrode 5. In positive photolithography, a certain



thickness of the exposed photo-definable polyimide 6 will then be removed in a development stage, this thickness being dependent on the amount of UV-exposure.

Figure 1d is a cross sectional illustration of the TFT plate following the development stage of the photo-definable polyimide 6. Exposed areas 11 of the polyimide have now been removed, and the surface topography of the polyimide now features the micro-bumps 12, and the via 13, for the pixel electrode 5 contact.

Figure 1e illustrates the TFT plate following the final stages of its production. The plate is firstly heated to induce reflow which results in the rounding of the micro-bumps 12, giving them the required topography for a diffusely reflective pixel electrode. Secondly, a layer of highly reflective metal 14, such as aluminium or silver is applied to the surface of the TFT plate in a method such as sputtering.

The SiNx grey-tone mask may be formed by the plasma deposition of SiNx:H onto a UV-transparent substrate such as a quartz plate. In one example, RF capacitively coupled plasma deposition was carried out at 13.56 MHz, at a temperature in the range 200 to 350 degrees centigrade and a pressure in the range 50 to 200 pascals. Other frequencies, temperatures and pressures may also be used. The preferred deposition gases were a mixture of silane, ammonia, nitrogen and hydrogen, although other mixtures could be used. The fraction of nitrogen, x, in the particular layer being deposited can be varied from 0.001 to 1.4 which results in an increase in the optical band gap of the material from 1.7 eV to 6.0 eV. Preferably the fraction x used is between 0.2 and 0.6 with associated band gaps of between 2.1eV and 2.5eV. Figure 2 is a graph illustrating the optical band gap Eopt exhibited by a layer of plasma deposited SiNx according to the ratio of NH<sub>3</sub> (ammonia gas) to SiH<sub>4</sub> (silane gas) used in the deposition process.

By incorporating SiNx of particular optical band gap in the grey-tone mask, a particular percentage of UV-light transmission will be observed. Figure 3 is a graph illustrating the transmission percentage, according to the wavelength of the UV light, exhibited by three different layers of SiNx, A, B and

C. The optical band gap of the SiNx of layer A is of 2.3eV and that of layer B is 2.14eV. The layer marked as C has the optical band gap of a combination of one layer of A and one layer of B. Typically, UV processing uses the g, h or i emission lines of mercury light, as shown on Figure 3.

5        Figure 4 is a graph representing the transmission properties of three layers of SiNx, D, E and F, each with an optical band gap of 2.3eV, and deposited with increasing thickness. Layer D has a thickness of 60nm, E of 66nm, and F of 78nm. Although slightly influencing the transmission property of the SiNx layer, the thickness has relatively little influence in comparison with  
10       the optical band gap, particularly for UV-light at the h-line wavelength. This is a property that contributes to the low cost of producing SiNx grey-tone masks, as great precision regarding deposition thickness is not vital.

      Figure 5 illustrates an example of the process of manufacture of a SiNx photo mask as may be used in the invention. In the first stage, plasma  
15       deposition on to a UV-transparent substrate 15 is used to form a first layer of a SiNx 16, having a thickness of 60nm, and an optical band gap of 2.14eV. Using the h-line of UV-light, this layer would have a UV transmission of 35%, or alternatively 23% when used in combination with a SiNx layer of an optical band gap of 2.3eV. Accordingly, the layer is then patterned using known  
20       techniques so as to leave only the regions where 35% or 23% transmission are required. Figure 5a is a cross-sectional view of the mask after these first stages of its production.

      In a further stage in the process of production of the mask, a layer of chrome 17 is deposited onto the substrate 15 and patterned. The chrome is  
25       left in regions of the mask where 0% UV-transmission is required. Additionally, the chrome is also left in regions where 35% transmission is required, i.e. over the previously deposited SiNx layer 16. This done so that the chrome layer 17, acts as a shielding layer to the first SiNx layer 16, when further SiNx layers are deposited. The resultant mask is illustrated in figure 5b.

30       Figure 5c is a cross section of the mask following the deposition and patterning of second SiNx layer 18, having a thickness of 60nm, and an optical band gap of 2.3eV. This is left in regions of the mask where 23% or 54%

transmission is required, 23% being achieved by this layer of SiNx 18 in combination with the first layer of SiNx 16.

Figure 5d is a cross section of the mask following a second patterning of the chrome layer 17. This is done to expose the regions where 35% transmission is required, i.e. where the first layer 16 of SiNx was deposited. The mask is now completed, in this example having 5 different transmission properties, 0%, 23%, 35%, 54% and 100%, as shown in Figure 5d.

Figures 6a to 6c illustrate a method incorporating a SiNx photo mask to produce a DMSR (diffusive micro slant reflector) pixel electrode for a TFT AMLCD. As has been previously described, the first stage involves the application of a layer of photo-definable material 19 to a pre-prepared TFT plate 20. In this example the layer 19 is HD Microsystems HD-8001 and is applied using the known technique of spin-coating at approximately 500 to 3000 rpm, to produce a polyimide thickness of approximately  $2\mu\text{m}$ . A photo mask 21 similar to that of Figure 5 is then placed in registration with the TFT plate and UV light is directed through it to expose the photo-definable polyimide 19. This stage in the process is illustrated in Figure 6a, where the exposed region 22 has a thickness dependant on the percentage of UV-light transmission through the photo mask 21. Layers on the photo mask are chrome 17, a first layer of SiNx with 35% transmission 16, and a second layer of SiNx with 54% transmission 18. As previously mentioned, a combination of the two different layers of SiNx provides a transmission of 23%. The features on the photo mask that define the micro-bumps of the DMSR pixel in this example are square when viewed from above, and are approximately  $2\mu\text{m}$  across. Each slanted region, such as that of Figure 6a, has a length of approximately  $5\mu\text{m}$  in this example.

Figure 6b is a cross-sectional view of the TFT plate following the development of the exposed polyimide, and a further process of heating to induce reflow. This results in the surface topography of the reflective pixel electrode having the rounded micro bumps, in addition to the slanted feature, which results in bumps 23, 24 and 25 being increasingly higher. In a final stage of this example, a layer of highly reflective aluminium 26, although silver

could also be used, is applied to the TFT plate using the process of sputtering. The resultant DMSR pixel electrode is illustrated in Figure 6c.

Figure 7a depicts a cross-sectional view of the DMSR pixel electrode at a stage in its manufacture. The photolithographic exposure stage has been carried out, and development of the photo-definable polyimide has then occurred. In this example, the TFT plate 25 now has four different thicknesses of polyimide remaining, shown as 28, 29, 30 and 31. A plan view of the pixel electrode 32 is illustrated in figure 7b to give an indication of its layout. Each of the micro-bumps 33 are square in this example, although shapes such as other polygons or circles could also be used. There may also be many more micro-bumps 33 per pixel 32, in order that an acceptable viewing area of the LCD is provided.

From reading the present disclosure, other variations and modifications will be apparent to persons skilled in the art. Such variations and modifications may involve equivalent and other features which are already known in the design, manufacture and use of photo masks and which may be used instead of or in addition to features already described herein.

Although Claims have been formulated in this Application to particular combinations of features, it should be understood that the scope of the disclosure of the present invention also includes any novel features or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any Claim and whether or not it mitigates any or all of the same technical problems as does the present invention.

The Applicants hereby give notice that new Claims may be formulated to such features and/or combinations of such features during the prosecution of the present Application or of any further Application derived therefrom.

## CLAIMS

1. A method of forming shaped structures on a device plate, comprising applying a photosensitive layer to said plate, and forming the  
5 shaped structures on the photosensitive layer in a photolithographic process using a grey-tone photo mask which comprises at least one region of semi-transparent material, said material having a degree of transparency which is dependent on the optical band gap of the material.
- 10 2. A method according to claim 1 wherein the material regions used in the grey-tone photo mask are hydrogenated silicon-rich silicon nitride  $\text{SiN}_x\text{:H}$  with  $x$  less than 1.
3. A method according to claim 1 or 2 wherein, prior to forming of  
15 the shaped structures in the liquid crystal display cells, the method further comprises the steps of forming the photo mask including:
- depositing a layer of said semi-transparent material to form said region of semi-transparent material on a UV-transparent substrate;
  - 20 • patterning said semi-transparent material;
  - depositing a layer of UV-opaque material onto the substrate; and
  - patterning said layer of UV-opaque material.
4. A method according to claim 3, including:
- 25 • depositing a layer of a second semi-transparent material having a different degree of transparency to the first material, where the degree of transparency is dependent on the optical band gap of the material, to form a second region of semi-transparent material on said UV-transparent substrate; and
  - 30 • patterning said second semi-transparent material.

5. A method according to claim 4 including patterning once again said layer of UV-opaque material.

6. A method according to claim 3, 4 or 5, wherein the UV-opaque material is Cr.

7. A method according to any preceding claim wherein said photo mask is used in said photolithographic process so as to produce an irregular surface topography for a diffusely reflective pixel electrode of a liquid crystal display.

8. A method according to claim 7 wherein said surface topography for said diffusely reflective pixel electrode of the liquid crystal display has multiple levels of thickness.

9. A method according to any preceding claim including forming an a AMLCD including the device plate.

10. A liquid crystal display device fabricated by a method as claimed in any preceding claim.

11. A mask configured for use in a method as claimed in claim 1.

12. A method of forming shaped structures on a transistor plate substantially as hereinbefore described with reference to the accompanying drawings.

13. A mask for forming shaped structures on a transistor plate substantially as hereinbefore described with reference to the accompanying drawings.

## ABSTRACT


**MANUFACTURE OF SHAPED STRUCTURES IN LCD CELLS, AND MASKS THEREFOR**





5

A method of forming shaped structures in liquid crystal display cells, comprises applying a photosensitive layer (6) to a transistor plate (2), and forming the shaped structures on the photosensitive layer in a photolithographic process using a grey-tone photo mask (7, 21). This mask  
10 comprises at least one region of semi-transparent material (8, 16, 18), the degree of transparency of which is dependent on the optical band gap of the material.

[Fig. 1c].

15

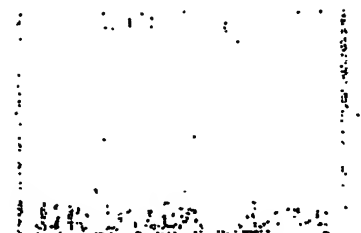

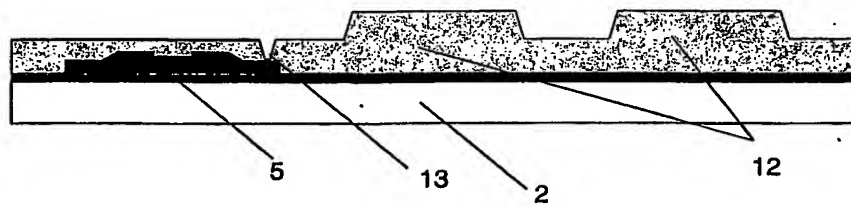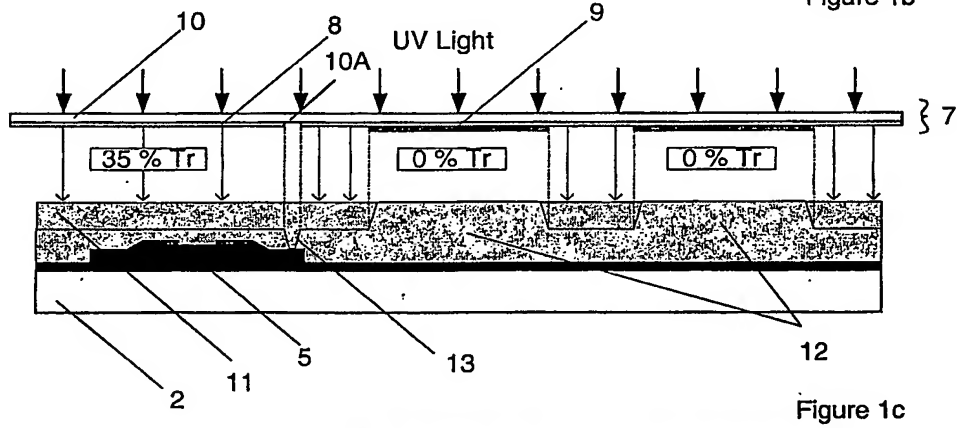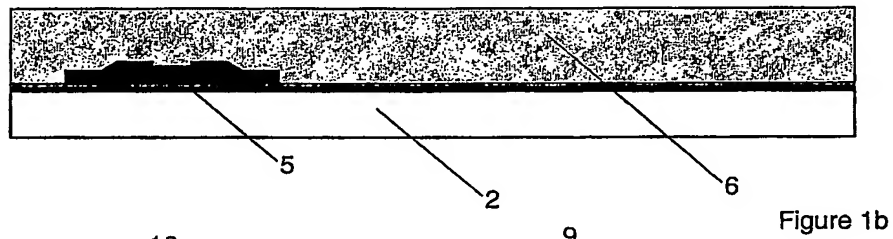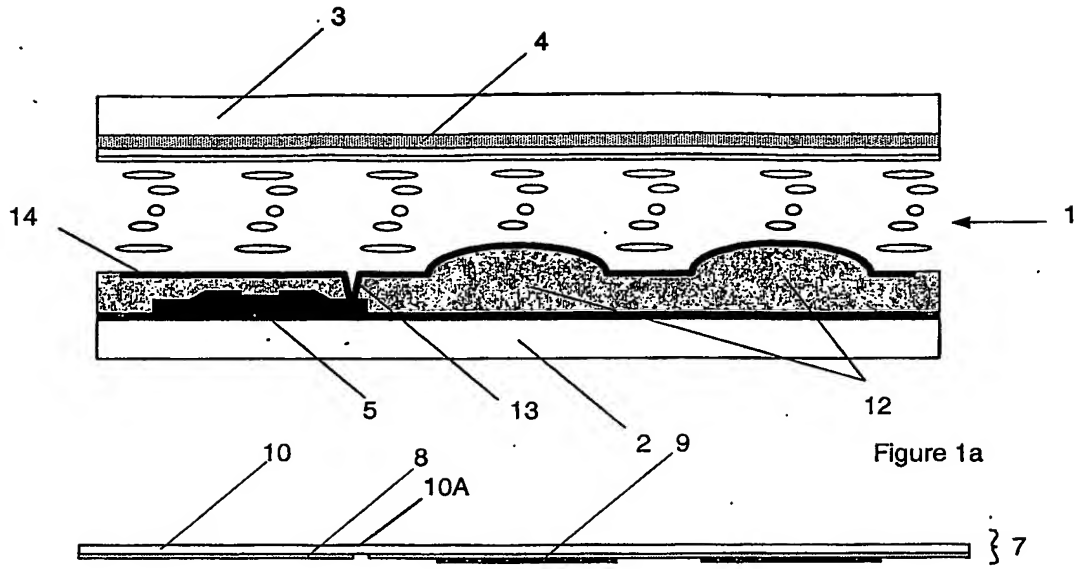



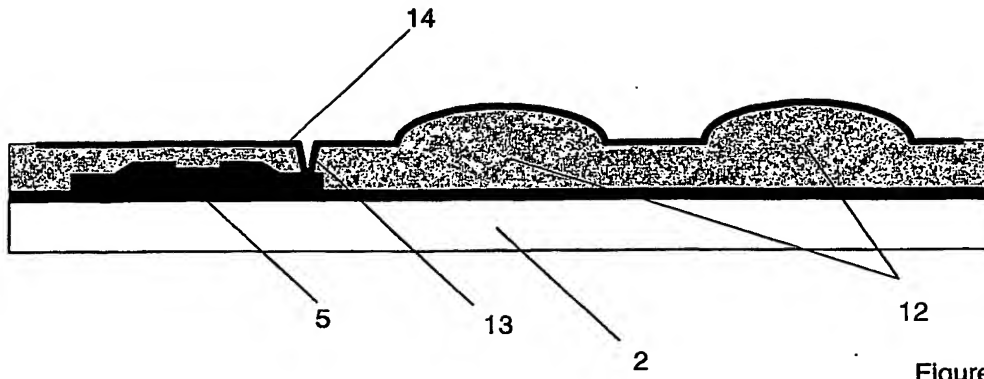


Figure 1e

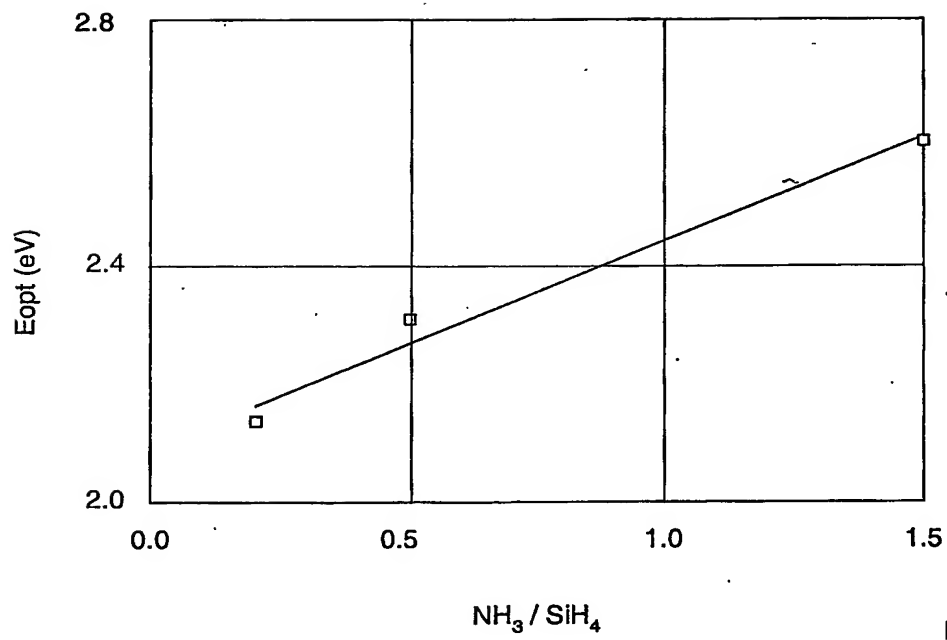


Figure 2

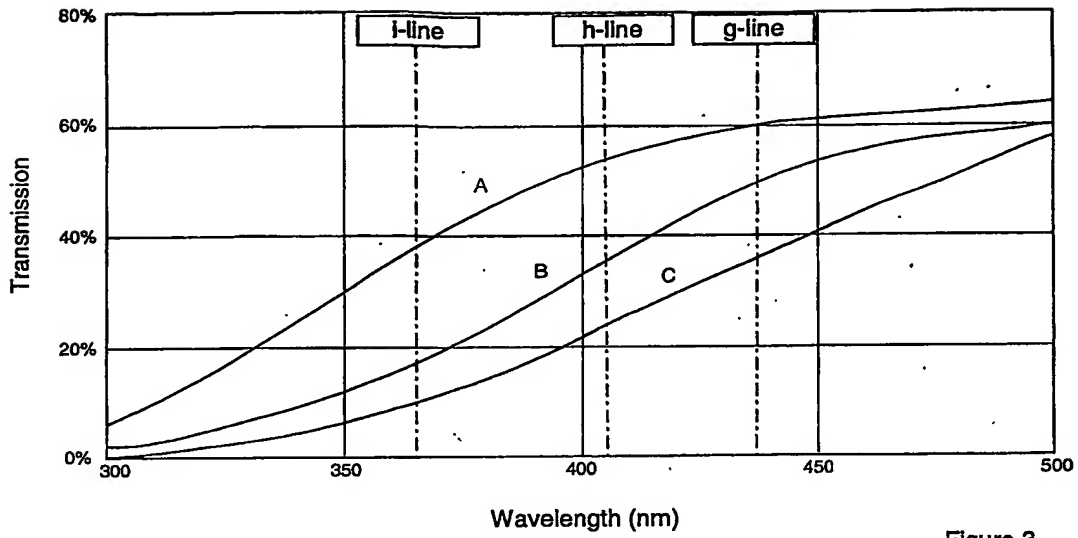


Figure 3

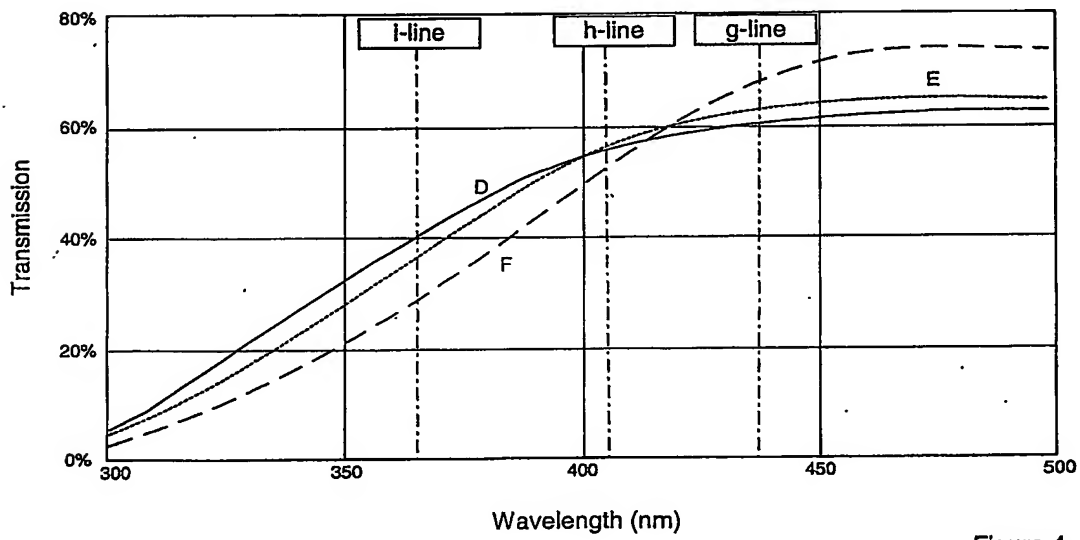


Figure 4

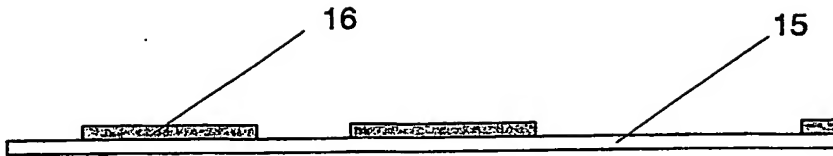


Figure 5a

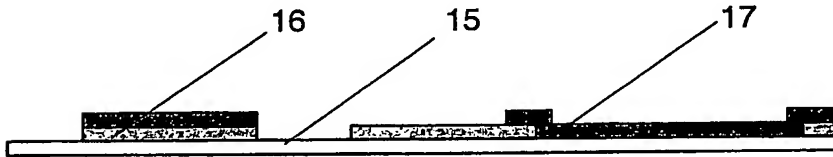


Figure 5b

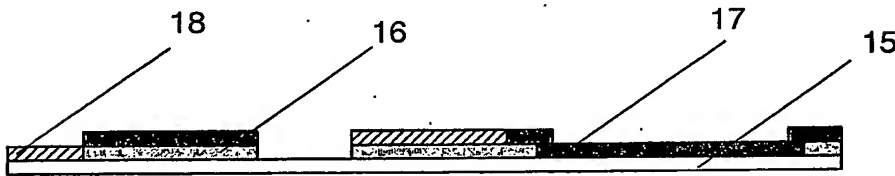


Figure 5c

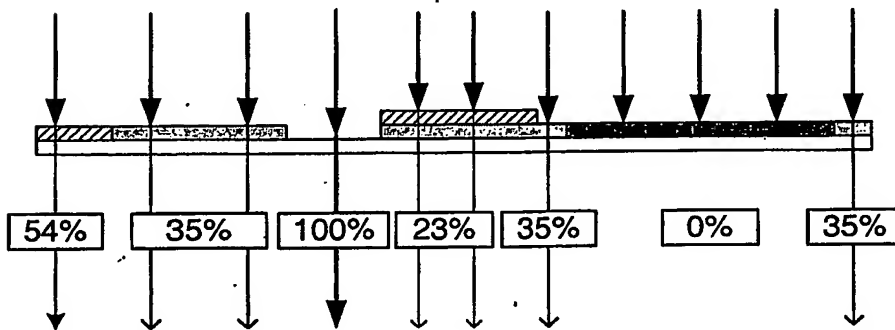
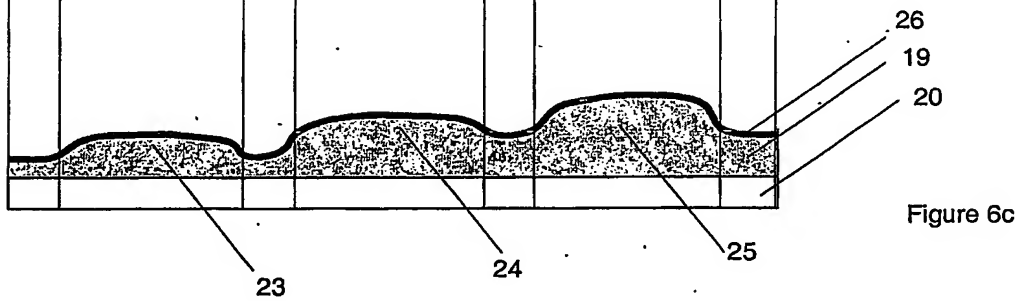
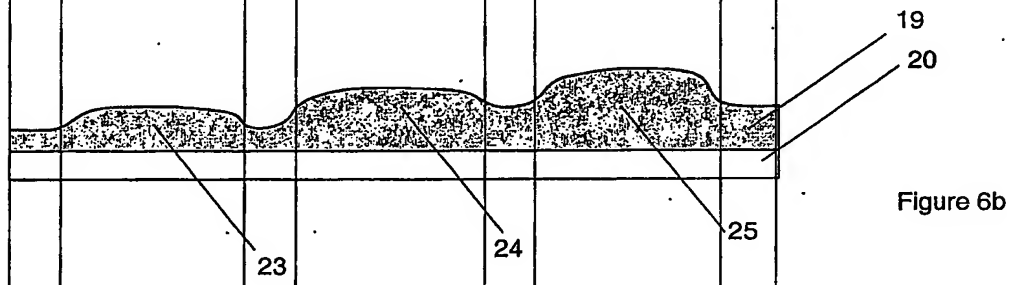
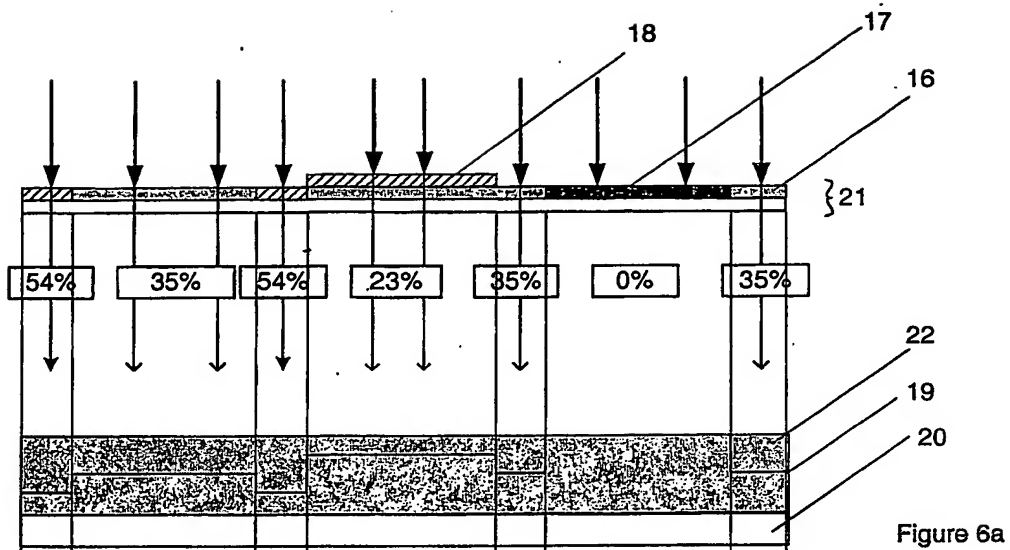


Figure 5d



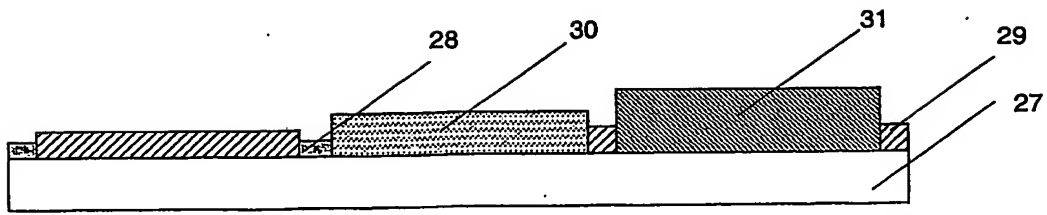


Figure 7a


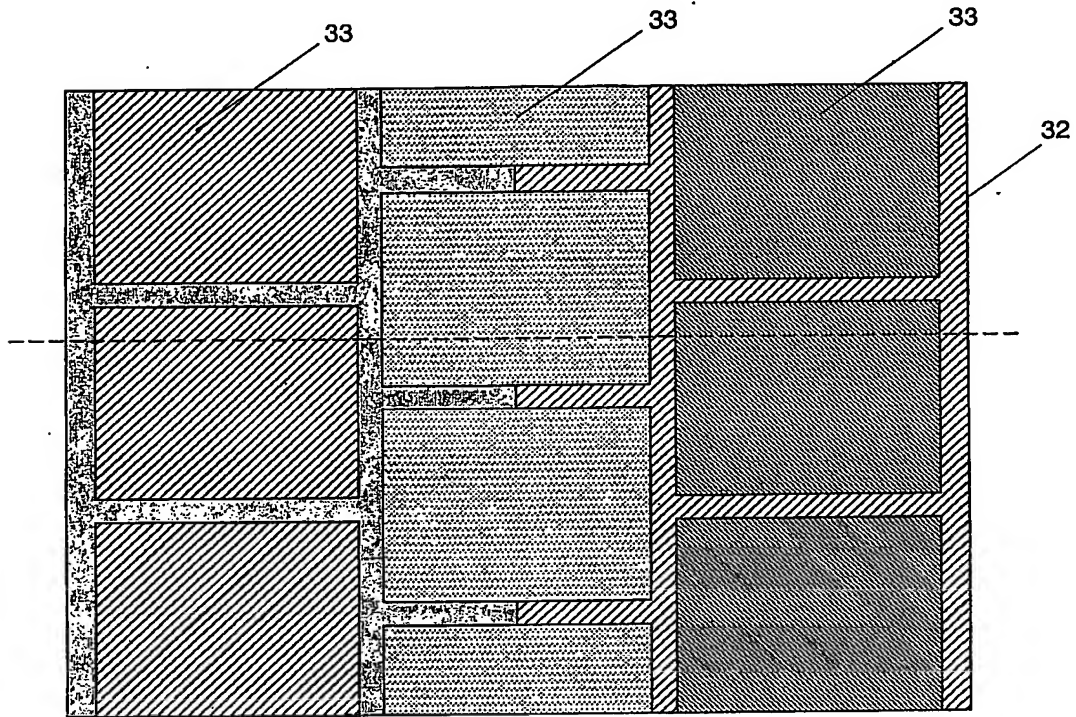


Figure 7b

PCT Application  
**IB0305705**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**